


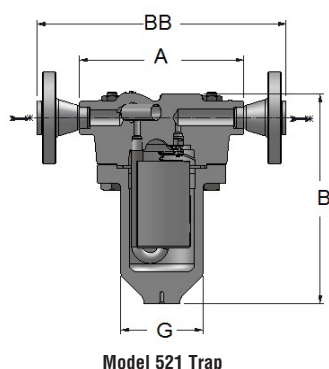

Description

Armstrong Model 521 horizontal installation offers smaller capacities at higher pressures.

A unique leverage system multiplies the force provided by the bucket to open the valve against system pressure. The mechanism is free-floating and has no fixed pivots to create wear or friction, because the mechanism is located at the top of the trap, no dirt can collect on the orifice. Small particles of dirt are held in suspension until discharged by the full differential purging action when the bucket sinks, pulling the valve off the seat. The discharge orifice is surrounded by a water seal, preventing live steam loss. Automatic air venting is provided by a small vent hole in the bucket. Inverted bucket traps drain continuously to prevent condensate backup. They are also resistant to water hammer. Model 521 adds the convenience and savings of in-line repairability and is designed to meet today's energy-management requirements efficiently and economically over a long, trouble-free service life. Model 521 also has an integral strainer to protect from dirt and scale

Connections

Screwed NPT and BSPT
Socketweld
Flanged

Materials

Body: ASTM A105N
Cap: ASTM A105N
Internals: All stainless steel—304
Valve and seat: Titanium
Strainer Screen: Stainless Steel
Bolt/Nut: ASTM A193 Gr B7 / ASTM A194 Gr 2H

Specifications

Inverted bucket steam trap with integral strainer, type ... in forged carbon steel, with continuous air venting at steam temperature, free-floating stainless steel mechanism, with the discharge orifice at the top of the trap.

How to Order

Specify:


- Model number
- Size and type of pipe connection. When flanges are required, specify type of flange in detail
- Maximum working pressure that will be encountered or orifice size
- Any options required

521 Side Inlet, Side Outlet Traps Add suffix "CV" to trap number for internal check valve.

Model No. Screwed or SW Model No. Flanged	521 521-FW	
Pipe Connections	in	mm
	1/2, 3/4	15, 20
"A"	8	203
"B" (Height, Screwed or SW)	10-5/16	263
"G" (Body OD)	4	102
Number of Bolts	8	
Weight Scr. or SW lb (kg)	30 (13.4)	

Consult factory for "BB" dimensions.

Model 521 Capacity

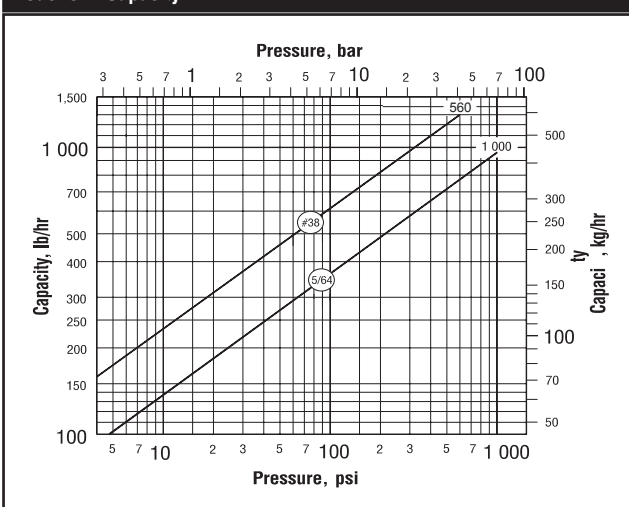

NOTE: #38 orifice in Model 521 is limited to 560 psig (39 barg).

Pressure-Temperature Rating for Forged Steel Traps

Model No.	Max. Oper. Pressure, Sat. Steam		Maximum Allowable Pressure (Vessel Design) of Pressure-Containing Parts at Indicated Temperature							
			°F		°C		°F		°C	
			-20/+650	-28/+343	700	371	750	399	800	427
	psig	barg	psig	barg	psig	barg	psig	barg		
521	1 000	69	1 000	69	1 000	69	950	65.5	840	58

NOTE: Maximum operating pressure to be marked on nameplate will be determined by actual orifice used. Traps with flanges may have different pressure-temperature ratings.