





shopvalves.com

JD & KD Series Ultra-Capacity Float & Thermostatic Steam Traps


Ductile Iron for Horizontal Installation, with Thermostatic Air Vent
For Pressures to 21 bar...Capacities to 64 400 kg/h

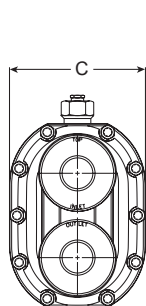

Series JD & KD Cap

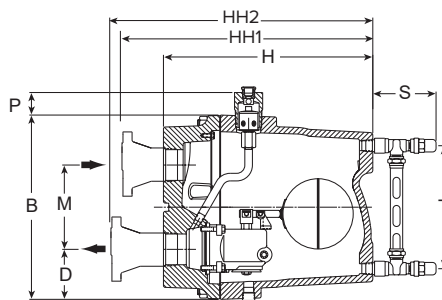

Series KD, F&T Shown

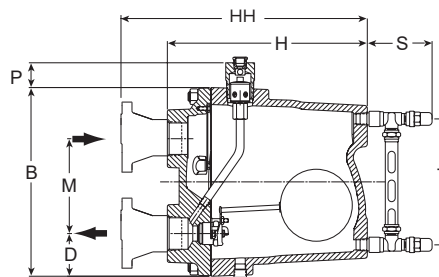

Series JD, F&T Shown

Description

The simple, yet rugged, ductile iron construction of the JD & KD Series Ultra-Capacity F&T steam traps offers long, trouble-free service. All floats, valves and seats, and lever mechanisms are constructed of stainless steel.

The integral thermostatic air vent is a balanced-pressure phosphor bronze bellows caged in stainless steel. It is designed especially for heavy-duty industrial applications where highly efficient, uninterrupted service is essential. This balanced-pressure-type air vent will respond to the pressure-temperature curve of steam at any pressure from zero to 21 bar. Thus – up to 21 bar – air is vented at slightly below steam temperature.

Maximum Operating Conditions

Maximum allowable pressure (vessel design):
Model JD & KD 21 bar @ 343°C¹

Maximum operating pressure:

Model 15-JD:	1 bar saturated steam
Model 20-JD:	1,4 bar saturated steam
Model 30-JD:	2 bar saturated steam
Model 75-JD:	5 bar saturated steam
Model 125-JD:	8,5 bar saturated steam
Model 175-JD:	12 bar saturated steam
Model 250-JD:	17 bar saturated steam
Model 300-JD:	21 bar saturated steam
Model 30-KD:	2 bar saturated steam
Model 50-KD:	3,5 bar saturated steam
Model 300-KD:	21 bar saturated steam

Maximum back pressure: 99% of inlet pressure
Maximum operating temperature: 217°C

Connections

Screwed BSPT and NPT
Flanged DIN or ANSI (screw on)

Materials

Body and cap: ASTM A395 ductile iron
Internals: All stainless steel – 304
Valve(s) and seat(s): Stainless steel
Drain plug: Carbon steel
Thermostatic air vent: Stainless steel and bronze with phosphor bronze bellows, caged in stainless steel

Options

- Integral vacuum breaker 10 bar maximum. Add suffix VB to model number
- No internal thermostatic air vent for liquid drainer service. Add suffix LD to model number
- Integral flash release for syphon drainage service. Add suffix CC to model number
- Armored gauge glass 17 bar @ 217°C

Specification

Float and thermostatic steam trap, type ... in ductile iron, with thermostatic air vent. Maximum allowable back pressure 99% of inlet pressure.

How to Order

Pressure	Model	Connection Size	Option
75	JD	8	VB
15	JD	8 = DN50	VB = Vacuum Breaker LD = Liquid Drainer CC = Condensate Controller GG = Gauge Glass
20			
30			
75			
125			
175			
250			
300			
30	KD	8 = DN50	VB = Vacuum Breaker LD = Liquid Drainer CC = Condensate Controller GG = Gauge Glass
50	KD	10 = DN65	
300	KD	10 = DN65	
		12 = DN80	

Special Configurations

Condensate controller with flash release for syphon drainage and/or cascade service. The condensate controller (CC) configuration was developed especially to meet very large capacity needs in applications where condensate must be lifted from the drain point to the trap. Under such conditions – often referred to as syphon drainage – the reduction in pressure that occurs when the condensate is elevated causes a portion of the condensate to flash into steam. Ordinary traps, unable to differentiate between flash steam and live steam, close and impede drainage. The JD & KD Series condensate controllers (CC) are equipped with a fixed, restricted orifice near the top of the body to bleed off the flash steam (and all air present). This permits the trap to function properly on condensate.

Liquid drainer with back vent for exceptionally high-capacity drainage of liquid from gas under pressure. The liquid drainer (LD) configuration was developed to meet very large capacity needs in draining water and other liquids from air or other gases under pressure. To prevent air or gas binding, the access port in the top of the body serves as a back vent connection to the equipment being drained. For capacity data, see pages LD-335 and LD-360 or consult your Armstrong Representative.

Table ST-136-1. JD and KD Series Side Inlet, Side Outlet Trap

Model No.	JD	KD
Pipe Connections	50	50, 65, 80
"B" Height	332	332
"C" Width	246	246
"H" Face-to-Face (screwed)	348	373
"HH1" Inlet Face-to-Face (flanged PN40*)	420	448
"HH2" Outlet Face-to-Face (flanged PN40*)	420	548
"D" Bottom to \bar{C}	74,6	90
"M" \bar{C} to \bar{C}	168	152
"P" Trap top to VB top	46	46
"S" (Gauge Glass width)	114	114
"T" (Gauge Glass height)	222	222
Weight in kg (screwed)	36,3	39,5
Weight in kg (flanged PN40*)	45	49

Dimensions in mm * Other flange sizes, ratings and face-to-face dimensions are available on request.
All models are CE Marked according to PED (2014/68/EU) † May be derated depending on flange rating and type.

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.

Armstrong International SA • Parc Industriel des Hauts-Sarts (2e Avenue) • 4040 Herstal • Belgium
Tel.: +32 (0)4 240 90 90 • Fax: +32 (0)4 240 40 33

www.armstronginternational.eu • info@armstronginternational.eu

shopvalves.com

JD & KD Series Ultra-Capacity Float & Thermostatic Steam Traps

Ductile Iron for Horizontal Installation, with Thermostatic Air Vent
For Pressures to 21 bar...Capacities to 64 400 kg/h



Table ST-137-1. JD Series Capacity

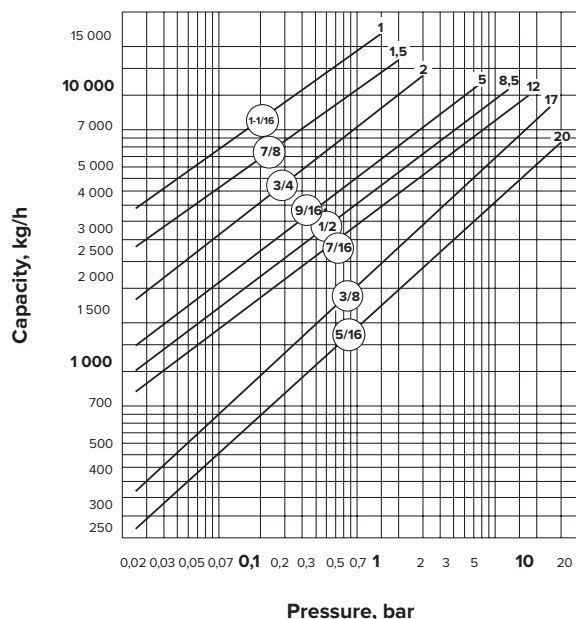


Table ST-137-2. Model 30-K8 Capacity


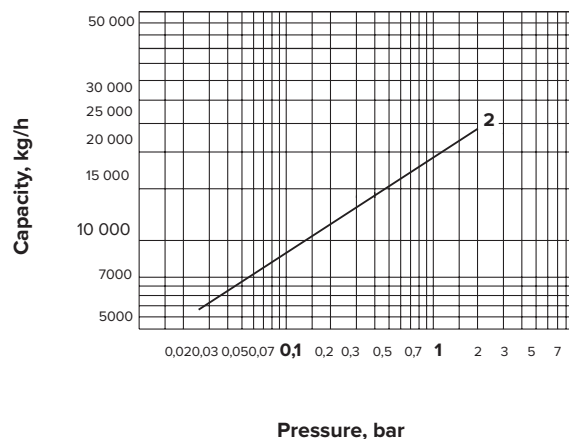


Table ST-137-3. Model 50-KD10/300-KD10 Capacity

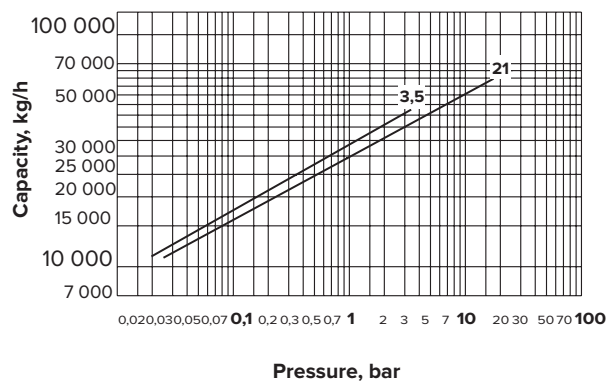

Options

Vacuum Breaker – 1/2" NPT

Many times, condensate will be retained ahead of steam traps because of the presence of a vacuum. To break a vacuum, air must be introduced into the system by means of a vacuum breaker.

For maximum protection against freezing and water hammer in heating coils under modulated control, for example, vacuum breakers are recommended in conjunction with freeze protection devices.

Table ST-137-4. Vacuum Breaker (dimensions in mm)

Size	1/2" NPT	Max. allow. pres.
"B" Pipe Connections	3/8"	10 bar
"C" Height	30	
"D" Width	22 Hex	


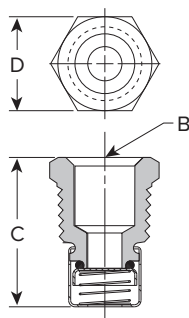


Table ST-137-5. Model 300-KD12 Capacity

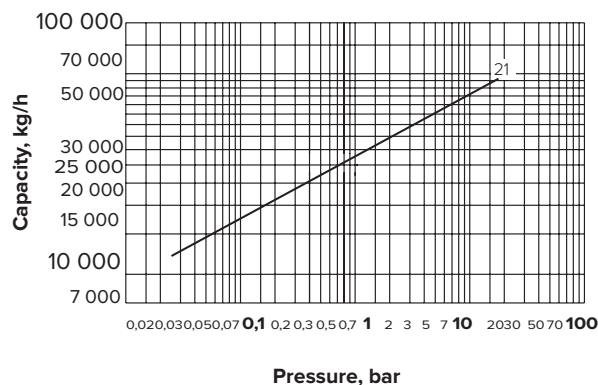

All dimensions and weights are approximate. Use certified print for exact dimensions. Design and materials are subject to change without notice.